
MINI 2 3D SCANNER

Quick Start Guide

V3.0

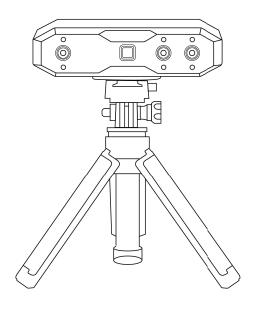

REVOPOINT

Thank you for choosing a Revopoint 3D scanner! Please carefully read this Quick Start Guide before your first scan.


Begin by downloading the Revo Scan software for your MINI 2 3D Scanner. For Windows and macOS users, visit the Support – Download section on Revopoint's website at revopoint3d.com to download. iOS and Android users, find Revo Scan on the Apple App Store or Google Play Store to download.

Go to the bottom of the Download page to get the latest Quick Start Guide. For tutorial videos, you can also follow our YouTube account, Revopoint 3D. This content is subject to change. Please refer to the latest version.


Contents


I	What's in the box?	1
I	Product Profile	1
I	System Requirements	2
ı	Connecting MINI 2 to a PC	2
	Method 1: Via USB Cable	2
	Method 2: Via Wi-Fi	3
I	Connecting MINI 2 to Phones	4
	Method 1: To Android Phones via USB Cable	4
	Method 2: To Android or iOS Phones via Wi-Fi	5
I	Mini Turntable Connection	6
I	Scanning Tips	6
I	Your First Scan	8
	Your First Scan Using Revo Scan (PC)	8
	Your First Scan Using Revo Scan (Phone)	9
ı	Sharing Projects from a Phone to a PC	9
K	C Warning	10
F	CC Warning	10

What's in the box?

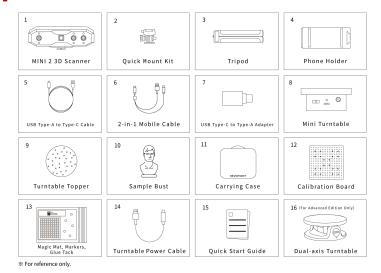

| Product Profile





1

System Requirements

Before your first scan, please download the Revo Scan software on Revopoint's website at revopoint3d.com. The system requirements are as follows:

Windows: Win 10/11 (64-bit) RAM: ≥ 16 GB CPU: Intel i7 12th or better	Android: System Version: 9.0 or better RAM: ≥ 8 GB Storage: ≥ 128 GB		
Mac: macOS 11.0 or better RAM: ≥ 8 GB CPU: MI Pro or better	iPhone: Models after iPhone X System Version: iOS 14.0 or better RAM: > 4 GB Storage: ≥ 64 GB iPad: 10th generation iPad or later		

Note: System requirements may change with software updates. Please refer to the latest version of User Manual in Revo Scan.


Scanner Connection


System	PC	Phone	
Mode	Windows/macOS	Android	ios
USB	√	√	×
Wi-Fi	√	√	,

Connecting MINI 2 to a PC


Method 1: Via USB Cable

Step 1: Connect the Quick Mount Kit to the scanner, then screw the Tripod to the Quick Mount Kit.









Step 2: Use the USB Type-A to Type-C Cable to connect the scanner to a PC. When the scanner's indicator ② turns solid green, it's powered.

Note: If your PC does not have a USB Type-A port, use the USB Type-C to Type-A Adapter.

Step 3: Open Revo Scan, when the software shows Scanner Connected and the scanner's indicator ① turns solid blue, it's ready.



Method 2: Via Wi-Fi








Step 1: Connect the Quick Mount Kit to the scanner, then screw the Power Bank Handle to the Ouick Mount Kit.

Note: The Power Bank Handle can be purchased from the Revopoint online store.

Step 2: Use the USB Type-A to Type-C Cable to connect the scanner and Power Bank Handle. When the scanner's indicator ② turns solid green, it's powered.







Step 3: Search for a Wi-Fi network called **MINI 2-REVO-XXXXXXXX** in your PC's Wi-Fi settings, and connect (no password is required).

Step 4: Open Revo Scan, when the software shows Scanner Connected and the scanner's indicator ① turns solid blue, it's readv.




Connecting MINI 2 to Phones

Method 1: To Android Phones via USB Cable

Step 1: Connect the Phone Holder and Power Bank Handle to the scanner.









Step 2: Put a phone in the Phone Holder, and use the 2-in-1 Mobile Cable to connect to the ports shown. When the scanner's indicator ② turns solid green, it's powered.

Note: The 2-in-1 Mobile Cable only connects the scanner to Android phones.

Step 3: Open Revo Scan, when the scanner's indicator ① turns solid blue and your device shows the scanning preview window, it's ready.

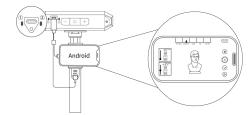

Method 2: To Android or iOS Phones via Wi-Fi



Step 1: Connect the Phone Holder and Power Bank Handle to the scanner.


Step 2: Put a phone in the Phone Holder, and use the USB Type-A to Type-C Cable or 2-in-1 Mobile Cable to connect the scanner to the Power Bank Handle. When the scanner's indicator ② turns solid green, it's powered.






Step 3: Search for a Wi-Fi network called MINI 2-REVO-XXXXXXXX in your smartphone's Wi-Fi settings, and connect (no password is required).


Step 4: Open Revo Scan, when the scanner's indicator ① turns solid blue and your device shows the scanning preview window, it's ready.



Mini Turntable Connection

Step 1: Connect the turntable to a PC or a 5V/1A third-party power adapter via the turntable's power cable. When the indicator turns solid green, it's powered.







Step 2: Place the object on the turntable. Flick the switch left or right to adjust the turntable's rotational direction, and twist the dial to adjust the rotation speed.


Note: For Dual-axis Turntable users, visit the Support - Download section on Revopoint's website at revopoint3d.com to download its Quick Start Guide.

Scanning Tips

- ① Please scan indoors and ensure only the object to be scanned is shown in the Depth Cameras' preview window. Ensure the object is evenly lit if you need a color model.
- ② Use scanning spray when scanning transparent, dark, and reflective objects.
- ③ Use scanning spray or adjust the Depth Camera's exposure when scanning objects with colored surfaces that absorb blue light.




Note: Scanning spray can be purchased from the Revopoint Store on our website.



Please stick markers irregularly on the object's surface or use the Magic Mat when scanning featureless objects like balls and cylinders, and choose Marker Tracking or Global Marker Tracking in Scan Settings - Tracking Mode in Revo Scan.

Note: To ensure accurate scanning results, do not move the Magic Mat during a scan.

⑤ Adjust the tripod to a suitable height and aim the scanner at the object. The distance between the scanner and the object can be between 120 – 250 mm. In the 3D scanning interface in Revo Scan, refer to the distance indicator bar to ensure an excellent distance between the scanner and the object. For handheld scans, move the scanner slowly and steadily around the object.

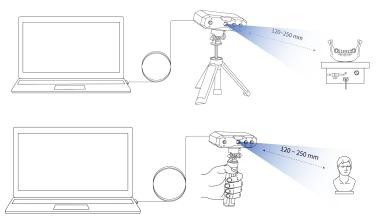


Note: Users can recalibrate the scanner using the Scanner Calibration program on Revo Scan's Home page to ensure accuracy. The scanner was professionally calibrated at the factory. Before calibrating, check the scanner's accuracy first after entering the calibration program and calibrate the scanner according to the on-screen instructions if needed.

Your First Scan


Your First Scan Using Revo Scan (PC)

After the scanner is connected, click the **New Project** button on Revo Scan's Home Page, then set parameters and start your scan using the following steps:

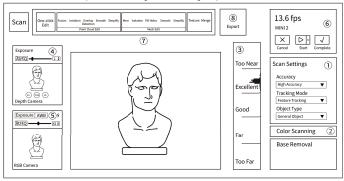

- ※ Please refer to the interface of Revo Scan.
- ① Choose Accuracy, Tracking Mode, and Object Type according to your requirements.
- 2 Toggle Color Scanning if a color model is needed.
- Move the scanner closer or further away from the object until the scanning distance indicator bar shows Excellent or Good.
- ④ Click the Auto button to automatically set the Depth Cameras' exposure, or turn off the exposure (Auto) and adjust it by dragging the slider until there are as few blue and red areas on the object in the Depth Camera preview window as possible.
- ⑤ You also must adjust the RGB Camera's exposure when doing a color scan. Click the Auto button to automatically set the exposure, or turn off the exposure (Auto) and adjust it by dragging the slider until the object's color in the RGB preview window is clear and sharp.
- ⑥ Click the □ button to begin your scan. Try not to scan the same areas repeatedly. You can click the □ button to stop and check your model anytime during your scan. If the model is incomplete, click the □ button to continue your scan. Click the □ button to finish the scan when the model is complete.
- ⑦ Click One-click Edit to process the model automatically, or manually edit the model using the Fusion, Mesh, Tpexture (only for color models) settings, and other tools if you need a more detailed model. Please refer to the User Manual on Revo Scan's Learning page for details.
- After post-processing, export the model in formats such as PLY, OBJ, or STL.

Your First Scan Using Revo Scan (Phone)

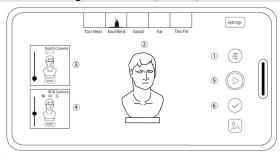

- ① Tap the so icon to choose Accuracy, Tracking Mode, and Object Type. Toggle Color Scanning if a color model is needed.
- ② Move the scanner closer or further away from the object until the scanning distance indicator bar shows Excellent or Good.
- ③ Tap the Auto button to automatically set the Depth Cameras' exposure, or turn off the exposure (Auto) and adjust it by dragging the slider until there are as few blue and red areas on the object in the Depth Camera preview window as possible.
- You also must adjust the RGB Camera's exposure when doing a color scan. Tap the Autobutton to automatically set the exposure, or turn off the exposure (Auto) and adjust it by dragging the slider until the object's color in the RGB preview window is clear and sharp.
- ⑤ Tap the 🚺 button to start your scan.Try not to scan the same areas repeatedly.
- ® Tap the button to finish the scan and and tap the Model button in the bottom right corner to enter the post-processing window and edit the model when the scan is finished. Please refer to the User Manual in Revo Scan's Settings section for details.
- Tyou can share the project to Revo Scan on your PC for more editing options. For details, see Sharing Projects from a Phone to a PC in this guide.

Note: Revo Scan on Android and iOS devices are continuously updated. Please refer to the actual interface.

Sharing Projects from a Phone to a PC

- ① Ensure the phone and PC are connected to the same Wi-Fi network.
- ② Open Revo Scan (PC) and click the **New Project** button on the Homepage.
- (9) Click the Import from Phone option in Revo Scan (PC)'s File menu.
- (4) Pick either the PIN code or the OR code transfer method.
- (5) Open Revo Scan (Mobile) and find the project to be transferred.
- (6) Tap the More button > Share icon in Revo Scan (Mobile).
- (7) Enter the PIN code or scan the OR code.
- ® Start the file transfer.

Note: Don't minimize the app or turn off the phone's display during transfer, or it'll fail.

IC Warning

This device complies with Industry Canada's licence-exempt RSS standard(s). Operation is subject to the following two conditions:

- (1) this device may not cause interference, and
- (2) this device must accept any interference, including interference that may cause undesired operation of the device.

This Class B digital apparatus complies with Canadian ICES-003.

IC RF Statement:

When using the product, maintain a distance of 20 cm from the body to ensure compliance with RF exposure requirements.

FCC Warning

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

(1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- -Reorient or relocate the receiving antenna.
- -Increase the separation between the equipment and receiver.
- -Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- -Consult the dealer or an experienced radio/TV technician for help.

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator & your body.

Follow Us:

















Contact Us:



Scan the QR code left with your phone and contact us for help.